

TAB

Version

Wall 60 cm - Black - 800 m³/h

Designer

Pio&Tito Toso

Collection

Design

EAN code

8034122352053



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Black opening frontal
Chrome edge
Electronic control
LED lighting on body and door
Top filter, removable and washable
Optional combined regenerable Carbon.Zeo filter
Charcoal filter included
Possible to duct wall mounted from rear
Optional Chimney

RAL 9005 / Matt black
 The RAL codes have to be considered indicative since production process and materials may alter the colors.

OPTIONAL ACCESSORIES

KACL.815
 Protective cleaning cloths for stainless steel (box 10 pcs)
KCTCN.001#I
 Chimney (Inox)
KACL.798#41F
 Remote under-roof motor 950 m³/h
KACL.770#41F
 Remote under-roof motor 1100 m³/h
 Brushless
KACL.786#41F
 Outdoor extractor fan 1000 m³/h
KACL.796#4AF
 Outdoor extractor fan 1500 m³/h
KACL.797#4AF
 Remote under-roof motor 1300 m³/h
KACL.941
 External filter unit for sloped hoods

TECHNICAL FEATURES

Installation type
 Wall
Dimensions
 60 cm
Finishing
 Black opening frontal
 Chrome edge
Motor
 800 m³/h
Type of control
 Electronic control
Speed settings
 4
Lighting
 Led 4x1,2 W - 3200 K
Filter
 Metallic filter "Top" - 2 pz
Charcoal filter
 Round charcoal filter Ø170 mm - Type 6
Minimum distance
 Gas hob: 55 cm
 Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
 20.00 kg
Net weight
 17.00 kg
Volume
 0.2 m³
Packaging size
 Length
 710 mm
 Height
 595 mm
 Depth
 480 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
 280 W
Voltage / Frequency
 220-240V
 50-60Hz
Plug type
 Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
 750 m³/h
 I.E.C. 61591
Maximum noise level
 66 dB(A)re1pW
 I.E.C.60704-2-13
Maximum pressure (Pa)
 510 Pa
Max. motor power
 224 W
ENERGY CLASS
 A

TAB

Version

Wall 60 cm - Black - 800 m³/h

Designer



Pio&Tito Toso

Collection

Design

EAN code

8034122352053



TAB

Version

Wall 60 cm - Black - 800 m³/h

Designer

Pio&Tito Toso

Collection

Design


EAN code

8034122352053

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	46	53	58	66
Capacity (m3/h) I.E.C.61591 Normalized Pipes	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

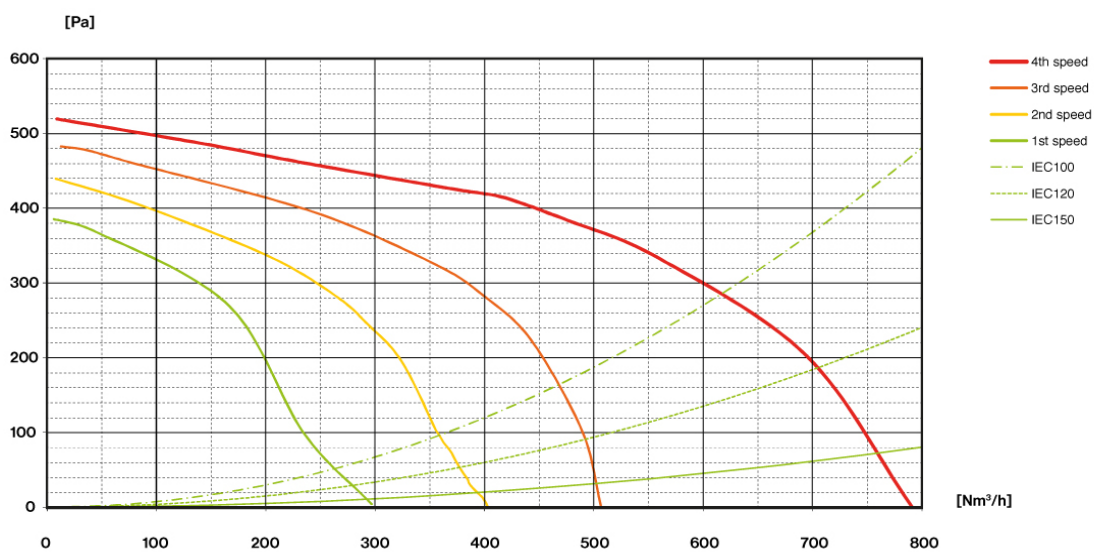

TAB

Version

Wall 60 cm - Black - 800 m³/h

Designer

Pio&Tito Toso


Collection

Design

EAN code

8034122352053

ENERGY LABEL

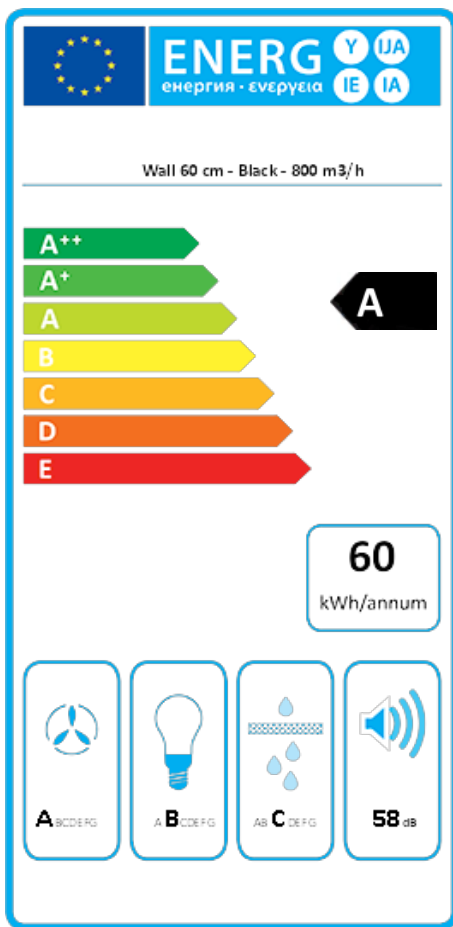

PF		
S	Falmec Spa	
M	Wall 60 cm - Black - 800 m ³ /h	
AEC	60,2	kWh/a
ECC	A	
FDE	29,8	
FDEC	A	
LE	24,9	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	295,0	m ³ /h
Qmax	500,0	m ³ /h
Qboost	750,0	m ³ /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0,9	
EEl	54,6	
Qbep	432,0	m ³ /h
Pbep	407	Pa
Qboost	750,0	m ³ /h
Wbep	164,0	W
WL	8,60	W
Emiddle	214	lux
Lwa-SPEmax	58	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.