

ZEUS PRO

Version

Wall 120 cm - 950 m³/h

Collection

Professional

EAN code

8034122355306

FEATURES

Scotch brite stainless steel (AISI 304)

Electronic control

LED lighting

Oil collector

Baffle filter

OPTIONAL ACCESSORIES

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

KACL.770#41F

Remote under-roof 1100 m³/h Brushless

KACL.786#41F

Outdoor extractor fan 1000 m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300 m³/h

TECHNICAL FEATURES

Installation type

Wall

Dimensions

120

Finishing

Scotch brite stainless steel (AISI 304)

Motor

1000 m³/h

Type of control

Electronic control

Lighting

Led 4x1,2 W - 3200 K

Minimum distance

Gas hob: 63 cm

Electric hob: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

Gross weight

35 kg

Net weight

31 kg

Volume

0,48 m³

Packaging size

Length

1310 mm

Height

595 mm

Depth

620 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

320 W

Current

220-240V

Frequency

50/60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

860 m³/h

I.E.C. 61591

Maximum noise

69 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)

600 Pa

Maximum power motor

260 W

ENERGY CLASS

A

ZEUS PRO

Version

Wall 120 cm - 950 m³/h

Collection

Professional


EAN code

8034122355306

MOTOR TECHNICAL SHEET

| Speed motor | 1 | 2 | 3 | 4 |
|---|-----|-----|-----|-----|
| Noise dB(A) _{re1pW-I.E.C.60704-2-13} | 53 | 58 | 64 | 69 |
| Capacity (m ³ /h) I.E.C.61591 Tubazioni normalizzate | 350 | 470 | 620 | 860 |
| Maximum pressure (Pa) | 500 | 540 | 560 | 600 |
| Power motor (W) | 185 | 215 | 240 | 260 |
| Air outlet | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE

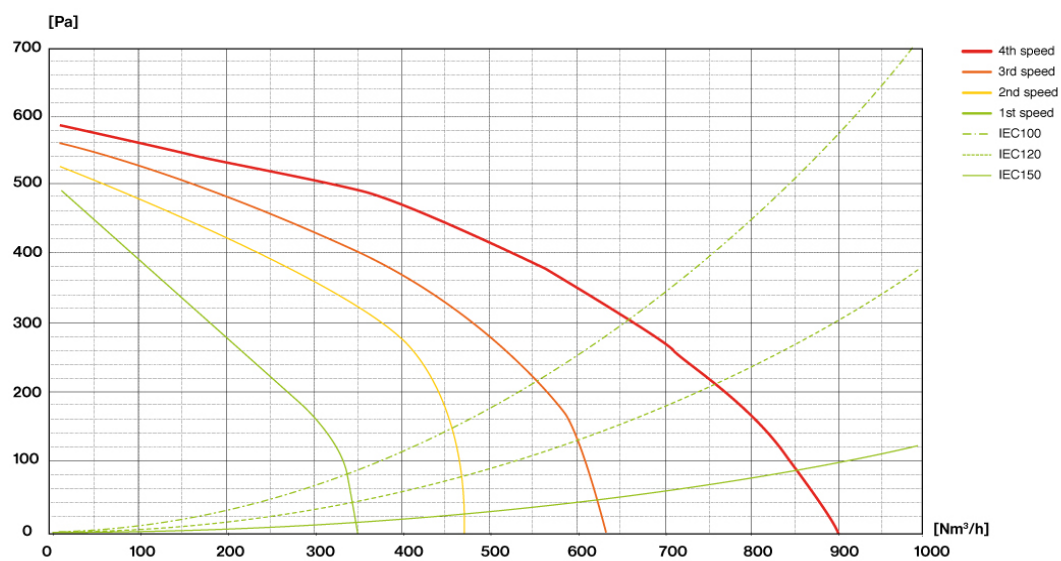

ZEUS PRO

Version

Wall 120 cm - 950 m³/h


Collection

Professional

EAN code

8034122355306

ENERGY LABEL

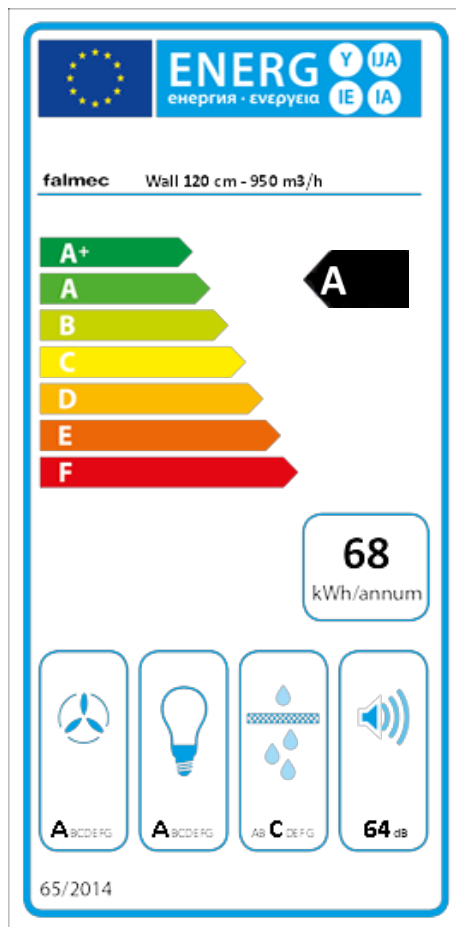

| PF | | |
|------------|-------------------------------------|-------------------|
| S | Falmec Spa | |
| M | Wall 120 cm - 950 m ³ /h | |
| AEC | 68,0 | kWh/a |
| ECC | A | |
| FDE | 29,3 | |
| FDEC | A | |
| LE | 39,0 | |
| LEC | A | |
| GFE | 74,0 | |
| GFEC | C | |
| Qmin | 350,0 | m ³ /h |
| Qmax | 620,0 | m ³ /h |
| Qboost | 860,0 | m ³ /h |
| SPEmin | 53 | dBa |
| SPEmax | 64 | dBa |
| SPEboost | 69 | dBa |
| PO | - | W |
| PS | 0,68 | W |
| PI | | |
| F | 0,9 | |
| EEl | 54,2 | |
| Qbep | 473,0 | m ³ /h |
| Pbep | 435 | Pa |
| Qboost | 860,0 | m ³ /h |
| Wbep | 195,0 | W |
| WL | 5,30 | W |
| Emiddle | 208 | lx |
| Lwa-SPEmax | 64 | dBa |

PF_Product fiche according to 65/2014 / S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SSPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps) / **PI_Additional information according to 66/2014** / F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point maximum air flow / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.